


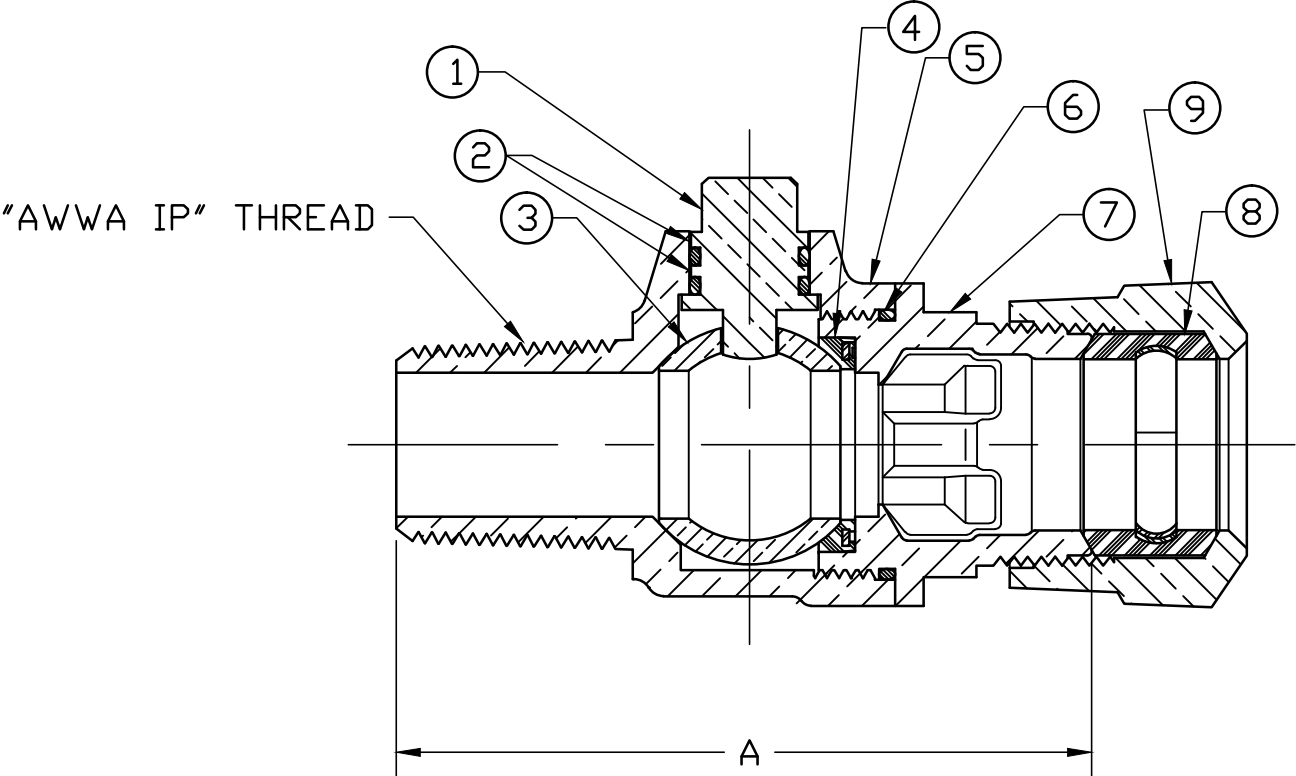


No.	DESCRIPTION	MATERIAL
1	STEM	CAST LOW LEAD BRASS ALLOY
2	O-RING	EPDM ASTM D2000
3	BALL	CAST LOW LEAD BRASS ALLOY
4	GASKET - SEAL	NITRILE ASTM D2000
5	BODY	CAST LOW LEAD BRASS ALLOY
6	O-RING	EPDM ASTM D2000
7	END PIECE	CAST LOW LEAD BRASS ALLOY
8	CTS GSKT SUB	SBR ASTM D2000 -GSKT 410ss -BAND
9	CONNX NUT	CAST BRASS ASTM B62 ALLOY C83600

VALVE SIZE	A
3/4	3-5/8"
1	4-41/64"
1 1/2	5-5/32"
2	5-39/64"

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\JJ\SUBMITTALS\E1935SG

						DRFTR	RWB	6/9/08	JONES		
						CHKR					
						ENGR					
						MGR					
									UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	
									SURFACE PREPARATION:		
									BREAK CORNER(S) ---- .000		
									SURFACE FINISH -- XX RMS	REF. No.	
							BY	DATE	TOLERANCE(S):		SCALE
									LINEAR ----- ± .000		
									ANGULAR ----- ± 0°00'		
						STK No:					
						MAT'L:					
						DESCR.					
						BALL TYPE CORPORATION VALVE					DWG NUMBER
						("MIP" x 110 CTS)					E1935SG
REV	ECR	DESCRIPTION	DATE	BY	CHKR						

DWG NUMBER
E1935SG
JJ-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING
DATA REMAINS IN Mueller Co. NO USE IS TO BE
MADE OF THIS DATA EXCEPT AS SPECIFICALLY
AUTHORIZED BY Mueller Co. ASSENT ON THE PART
OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED