


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (NITRILE)
6	SOLID PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	O-RING	ASTM D2000 (EP)
10	PJ GASKET	ASTM D2000 (BUNA N)
11	WASHER	POLYPROPYLENE
12	CLPG NUT SUB	CAST BRASS ASTM B62 ALLOY C83600
13	LOCKNUT	CAST BRASS ASTM B62 ALLOY C83600
14	RUBBER GASKET	ASTM D2000 (NITRILE)

SIZE	A	B	C	D	E
3/4"	.750	3.699	3.160	2.32	.840
1"	1.000	5.026	3.738	2.588	1.150

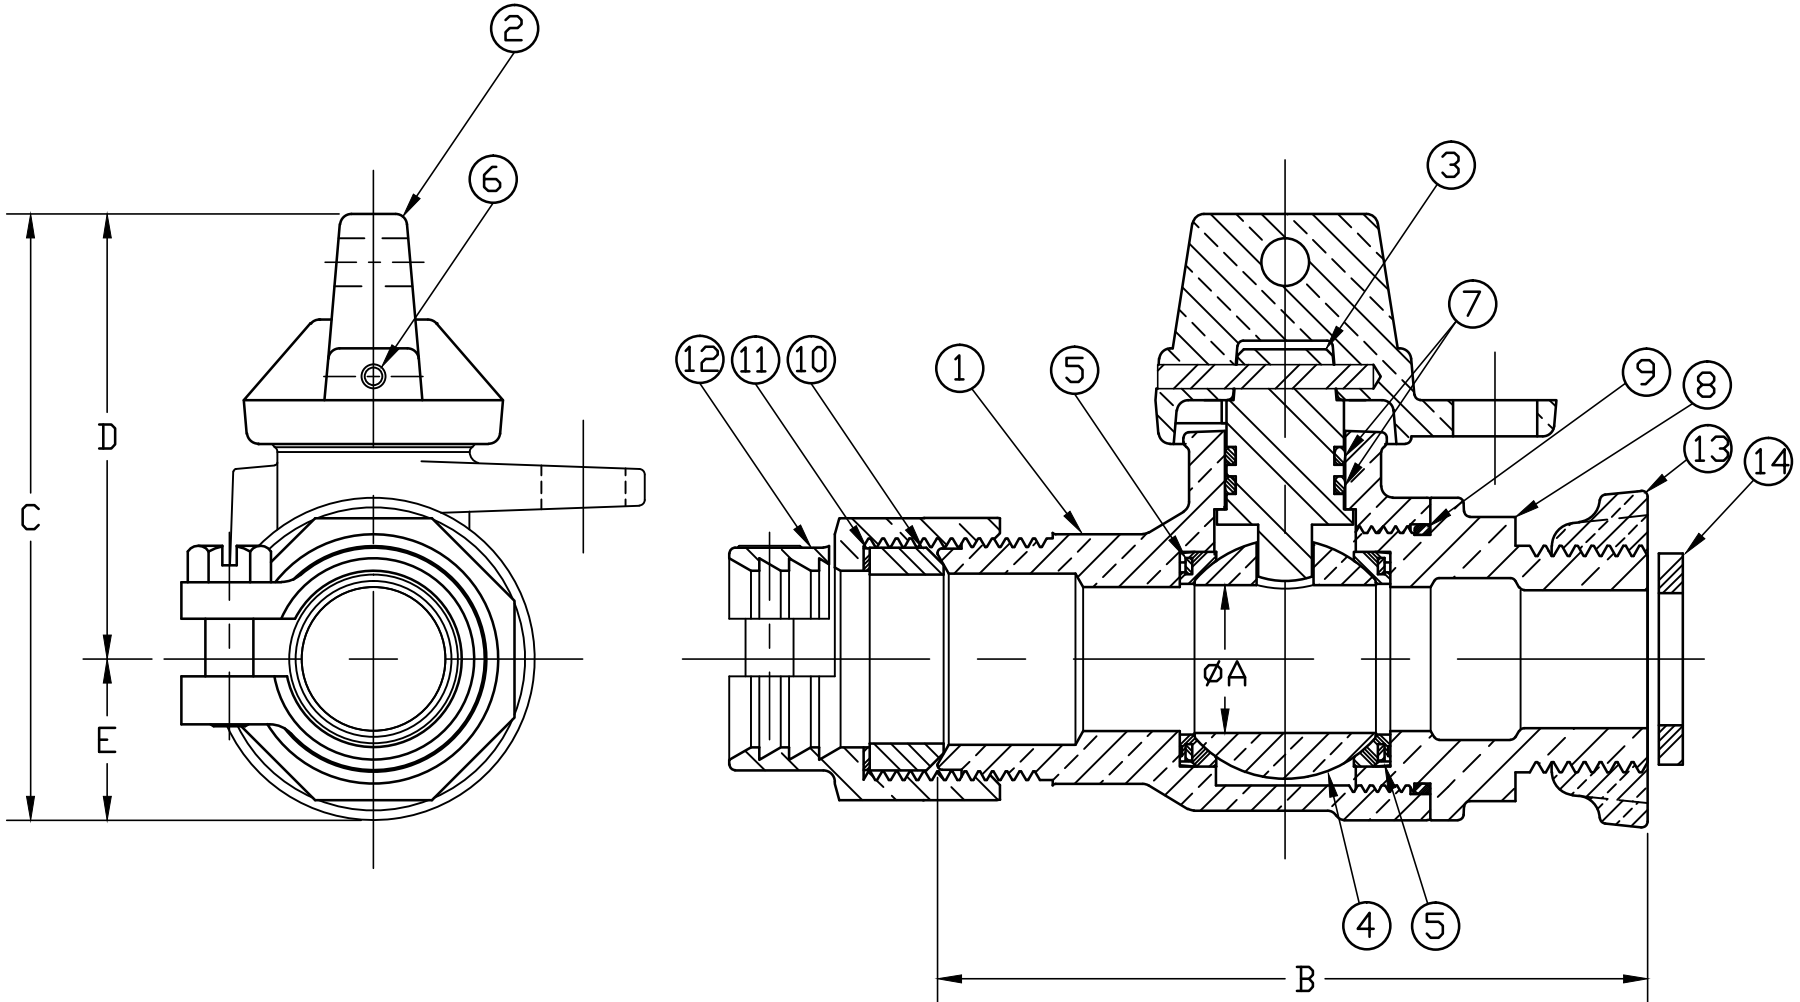

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\JAMESJONES\SUBMITTALS\E6441W

DWG NUMBER
E6441W

TITLE TO AND OWNERSHIP OF THIS ENGINEERING
DATA REMAINS IN Mueller Co. NO USE IS TO BE
MADE OF THIS DATA EXCEPT AS SPECIFICALLY
AUTHORIZED BY Mueller Co. ASSENT ON THE PART
OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED

						DRFTR	RWB	5/16/16	JONES UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH --XXX RMS TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'		THIRD ANGLE PROJECTION 		
						CHKR					REF. No.	SCALE	
						ENGR							
						MGR							
							BY	DATE					
						STK No:							
						MAT'L:							
						DESCR.						DWG NUMBER	
						PER EST NO: DXXXX EST FIN WT = 0.0000 lbs						E6441W	
						INLINE LLB BALL METER VALVE (CTS PJ x IRON MTR BAR)							